



## P16HP




## P16HPZ



## YB-P16HP/P16HPZ FEATURES



P16HP/P16HPZ is a hand pump operated hydraulic crimping machine for repair workshops and field use. Easy to use, light and compact in size, allowing to be carried to any location.

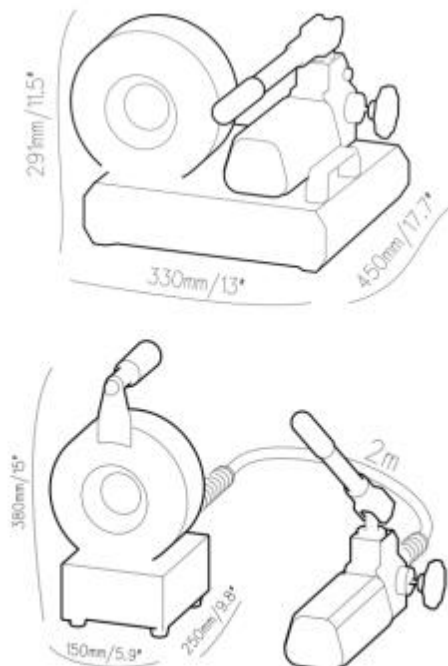

### CONTROL

Manual

### TECHNICAL DATA

Max crimping dia (mm)	10-45
Max crimping dia (inches)	0.39-1.77
Max. crimping force (kN)	955
Max. crimping force (tonnage)	95
Cycle time 10 mm (s)	—
Hose size ID (inches)	1
Dies set series	P16
Max. opening (mm)	+20
Max. opening without dies (mm)	59
Master die D / L (mm)	39/64
Master die D / L (inches)	1.54/2.52
Motor Power	Hand pump

### DIMENSIONS (L x W x H)

P16HP (mm)	330X450X291
P16HP (inch)	13X17.7X11.5
P16HPZ (mm)	150X250X380
P16HPZ (inch)	5.9X9.8X15
Package (mm)	475X430X410
Package (inch)	18.7X16.9X16.1

### WEIGHT (KG)

P16HP N.W.	26
P16HP G.W.	34
P16HPZ N.W.	24
P16HPZ G.W.	32

### P16 Dies:

DieSetNo	Crimping range	ID (mm)	L (mm)
P16/06*	6.0 - 8.0	6	55
P16/08*	8.0 - 10.0	8	55
P16/10*	10.0 - 12.0	10	55
P16/12*	12.0 - 14.0	12	55
P16/14	14.0 - 16.0	14	55
P16/16	16.0 - 19.0	16	55
P16/19	19.0 - 23.0	19	55
P16/23	23.0 - 27.0	23	55
P16/27	27.0 - 31.0	27	65
P16/31	31.0 - 38.0	31	65

\*: Non standard die

